


BW4 neo CTM/CTM-S (CE)

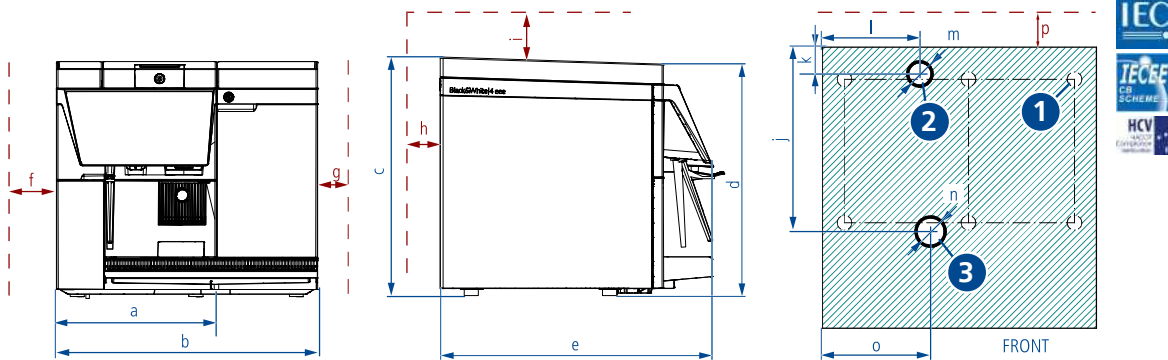


- 1 Machine feet
- 2 Fixed water connection and drain
- 3 Grounds ejection (optional)

a	345 mm (13.6 in)	b	565 mm (22.2 in)	c	505 mm (19.9 in) 550* mm (21.6* in)	d	490 mm (19.3 in) 535* mm (21* in)
e	580 mm (22.8 in)	f	150 mm (5.9 in)	g	100 mm (3.9 in)	h	80 mm (3.1 in)
i	350 mm (13.8 in)	j	379 mm (14.9 in)	k	55 mm (2.1 in)	l	200 mm (7.8 in)
m	50 mm (1.9 in)	n	60 mm (2.3 in)	o	222 mm (8.7 in)	p	80 mm (3.1 in)

* Height fixed water / wastewater operation

Drain

- **q**: Distance of machine to drain < 1 m
- Drain line (hose) not sagging.
- No back pressure in the water line.
- The end of the line not submerged in water.



Machine parameters		Water connection specifications	
Connection / power CE	220-240 VAC	Water supply	3/8"
	50-60 Hz	Dynamic water pressure	2-4 bar
	2000-2350 W	Steam boiler pressure	2.6 bar
Weight	42 kg	Chlorine	None
		TDS	70-200 ppm
		Total hardness	5-8 °dH
		pH	6.8-7.4
		Alkalinity	<100 ppm
		Iron	<0.25 ppm